


Opal Freestanding Bath Mixer With Hand Shower


Nero



Versions:202506

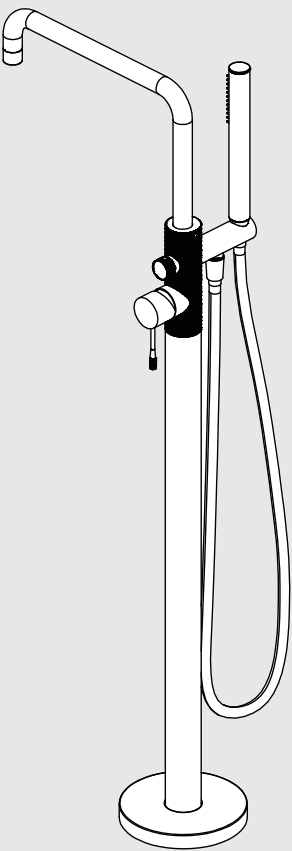

Drawing

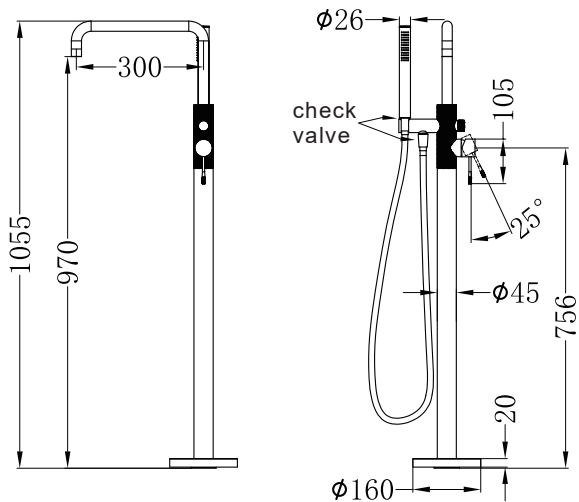

Specifications

SKU
NR251903a

Watermark License
WM-060073

Temperature Rating
Min 1°C-Max 75°C

Pressure Rating
Min 150kpa - Max 500kpa

Finish

- | | |
|--|--|
|  Brushed Bronze
NR251903aBZ |  Graphite
NR251903aGR |
|  Brushed Gold
NR251903aBG |  Brushed Nickel
NR251903aBN |

Packaging Includes

- 1x mixer tap
- 1x extension tube
- 1x floor cover plate
- 2x water pipes
- 1x mixer box
- 1x gloves
- 4x dynabolt
- 1x instruction
- 1x allen key pack
- 1x leveling plate
- 1x gradiometer
- 1x testing plugs


*Dimensions are nominal measurements only.

Installation Instruction

Please go through all spare parts list when you open the box, if any problem, please contact the seller. Spare parts list as follow.

Part List

- 1.Mixer Tap x1pc
- 2.Extension Tube x1pc
- 3.Floor Cover Plate x1pc
- 4.Water Pipes x2pcs
- 5 Mixer Box x1pc
- 6.Dynabolt x4pcs
- 7.Hand Shower x1pc
- 8.PVC Shower Hose x1pc
- 9.Gloves x1pc
- 10.Instruction x1pc
- 11.Allen Key Pack x1pc
- 12.Leveling Plate x1pc
- 13.Gradiometer x1pc
- 14.Testing Plugs x2pcs

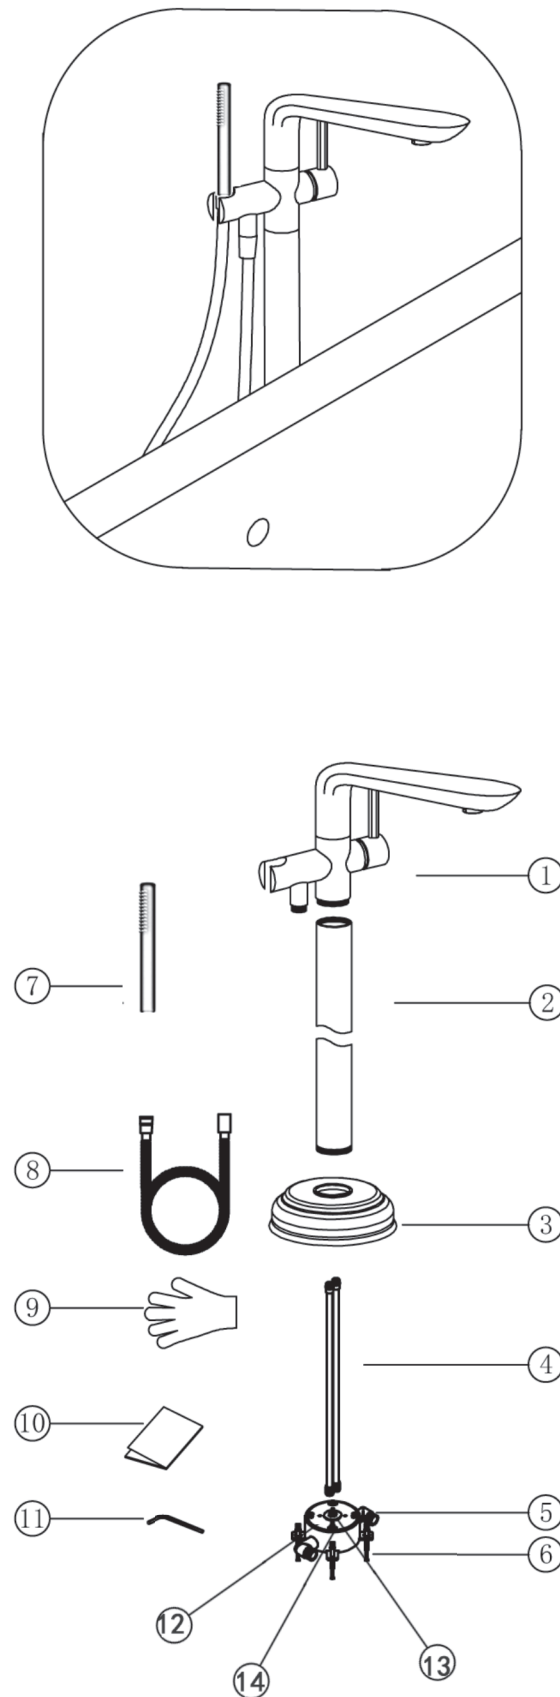

Notice: Not recommend to be installed on concrete slab	1.Mixer box should not finish more than 2mm above finish tile level	2.Connect hot and cold water use materials recommended Australian standard
3.Adjust mixer box make sure in a level by gradiometer provided	4.Test and check for water leaks	5.Undo 4 grub screws on the leveling plate and take out the gradiometer and testing plug.
6.Attach the leveling plate onto the extension tube by provided grub screws	7.Screw hot and cold water pipes into the mixer body	8.Fit floor cover plate onto the extension tube
9. Screw the extension tube onto the mixer, and fix hot and cold water pipers into mixer box by M5 grub screws provided	10.Connect hand shower rose with PVC hose	11.Flush pipes work and test, check for water leaks

Nero

